



Uniform low glare controlled lighting for floors, ceiling and walls for increased visibility and security.

LEDicated



VGS40QF1X60

- Center of Standard 30ft X 60ft Parking Bay
- 3.0 FTC AVG, 7.3 FTC MAX, 1.5 FTC MIN, 2.3:1 AVG/MIN, 4.9:1 MAX/MIN


Fixture:
Die Cast Aluminum Housing,
Powdercoat Finish,
UV-Stabilized Polycarbonate Lens.

Listing & Ratings:
CSA: Listed for Wet Locations,
ANSI/UL 1598, 8750. IP66 Sealed
LED Compartment.

Wattage:
40w Array: 37w, System: 40w;
(Up to 100w HID Equivalent)
60w Array: 53w, System: 60w;
(Up to 175w HID Equivalent)
84w Array: 74w, System: 84w;
(Up to 175w HID Equivalent)

Controls & Options:
Motion Sensors, Surge Protection,
Fuses, Battery Backup

MOUNTING OPTIONS

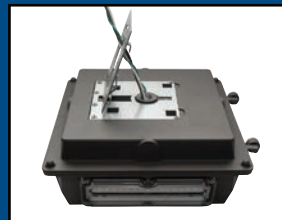

Easy Hang Mount



Trunion



Pendant

MODEL VGS40QF LED Garage Square with Type VS Optics				
WATTAGES	DRIVER	CCT	COLOR	MOUNTING
<ul style="list-style-type: none"> •1x40w •1x60w •1x84w 	<ul style="list-style-type: none"> •120-277v (U) •347-480v (H) 	•4000K (4K)	<ul style="list-style-type: none"> •Bronze (Z) •Custom Color (Consult Factory) 	<ul style="list-style-type: none"> • Easy-Hang Bracket • Trunion • Pendant Mount

OPTIONS See Specification Page for Options.



L70
25°C 138,000 Hours


Highly Uniform Performance Optics




TYPICAL GARAGE LAYOUT

30ft X 60ft Bay; 9ft Mounting Height

PLAN VIEW

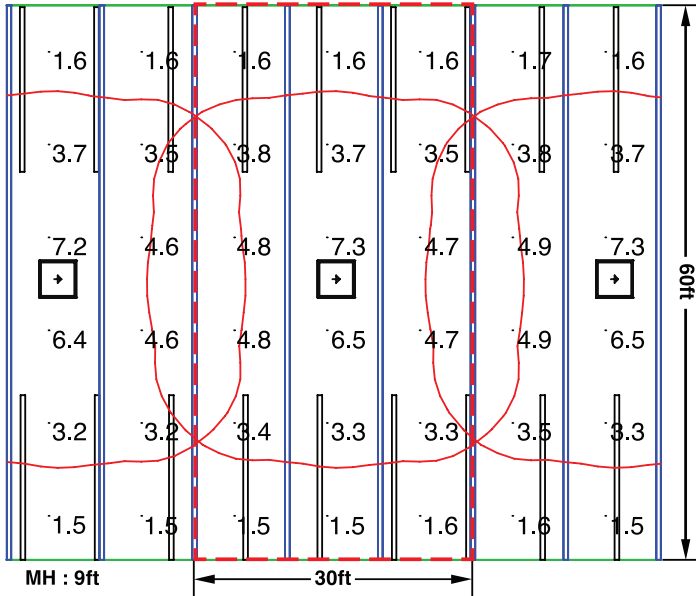


POLAR GRAPH

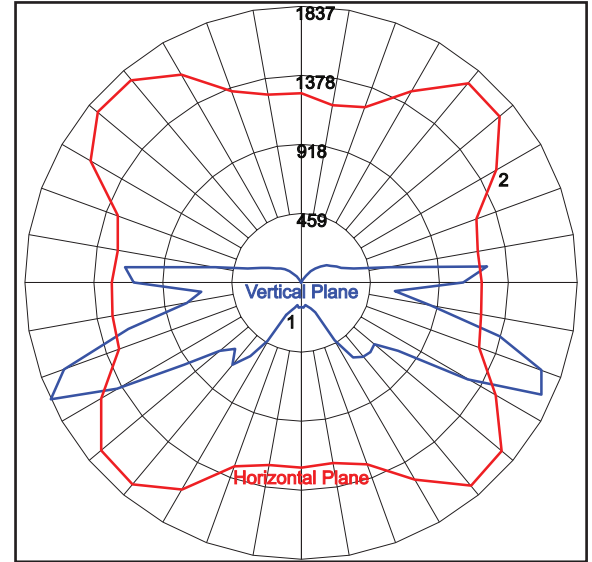

- Horizontal Max Candela above normal viewing angle when driving.
- Square Type 5 pattern creates better uniformity.

RENDERED VIEW

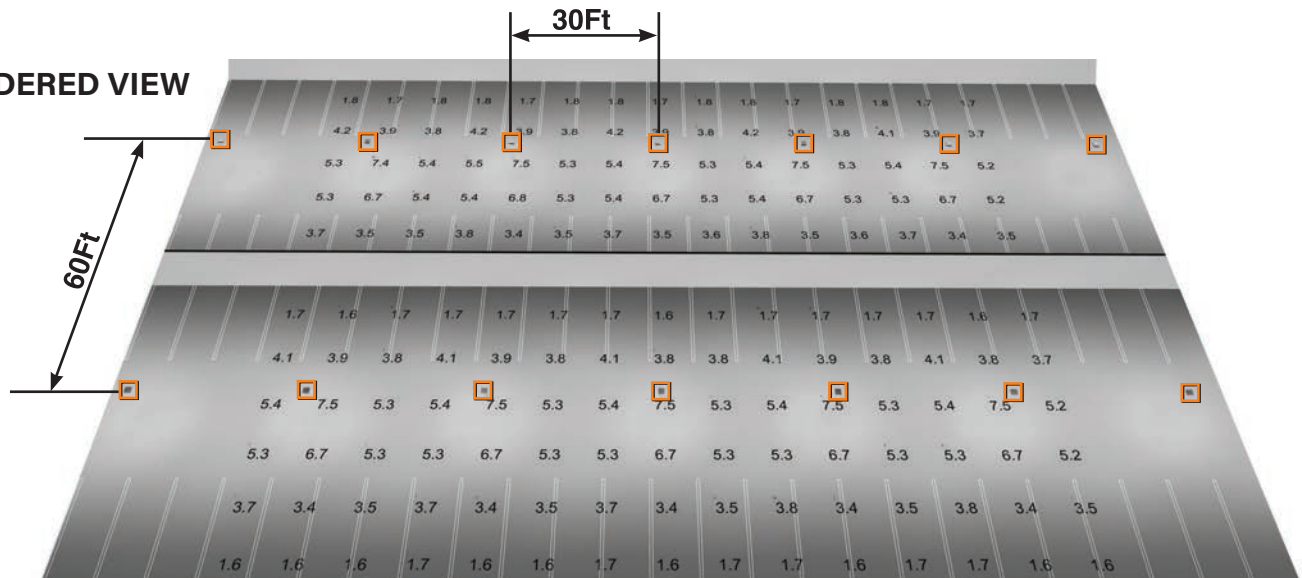

VGS40QF1X60 3.0 FTC AVG, 7.3 FTC MAX, 1.5 FTC MIN, 2.3:1 AVG/MIN, 4.9:1 MAX/MIN

Exceeds IES RP-20-98 of 1.0 FTC MIN and MAX/MIN of 10:1